

# Step-By-Step Quick Start Guide To Using Your Generator

## 1 Remove Generator From Package

## 2 Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)  
Oil Capacity: 7.5 fluid oz. Open side panel to add oil.  
This generator includes Low Oil Shut Off and will not start with low oil. Start out with 7.5 oz, then **FILL UNTIL ALMOST OVERFLOWING.** (FIGURE 1)

## 3 Add Fuel

Unleaded gasoline only octane rating of 87 or higher  
Maximum Capacity: 0.55 Gallons (FIGURE 2)

## 4 Start The Generator

- Use the generator **OUTDOORS** in a **WELL VENTILATED AREA**.
  - **DO NOT CONNECT** electrical devices until **AFTER** the generator is started.
  - Turn Engine Switch to **ON** (FIGURE 3)
  - Turn the fuel tank cap air vent knob clockwise to the "OPEN" position." Turn **FUEL PETCOCK** to **ON** (Figure 4)
  - Adjust the **CHOKE** to **CLOSED/CHOKE** position (Figure 5)
  - Pump the **Primer** button until glass bowl is full (Figure 6).
  - Start the generator with the **Recoil** (Pull) Start. (Figure 7)
  - Once the engine has started, **GRADUALLY** move the choke lever to the "RUN/OPEN" position until the engine levels off. Then let the engine run approximately 5 minutes **BEFORE** adding appliances or tools.
- You can now connect electrical devices.

### 1 Remove Cover To Add Oil



### 4 Fuel Petcock To ON



### 5 Choke/Closed Position



### 6 Pump PRIMER Button



### 7 Recoil Start



## GEN1000I-SS

1,000 Surge / 800 Running Watts

**UNLEADED GASOLINE FUEL**

### GENERATOR SPECIFICATIONS:

- 1.3 HP Engine / 4 Stroke / 5,500 RPM
- Recoil Start
- 0.55 Gallon Fuel Tank
- 7.5 fluid oz. SAE10W-30 Oil
- Low Oil Shut Off
- UL Listed Electrical Outlet
- Engine Shut Off Switch
- Circuit Breaker & Power Outlets
- 1 - 12V D/C Outlet
- 1 - 120V A/C Outlet
- Complies with EPA / CARB emissions
- Run time = 6.3 hours @ 50% load
- Decibel Rating < 56 db @ 0% load
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited


**OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.**

Read and understand instruction manual before using generator.

## GEN1000I-SS

1,000 Surge / 800 Running Watts

**UNLEADED GASOLINE FUEL**

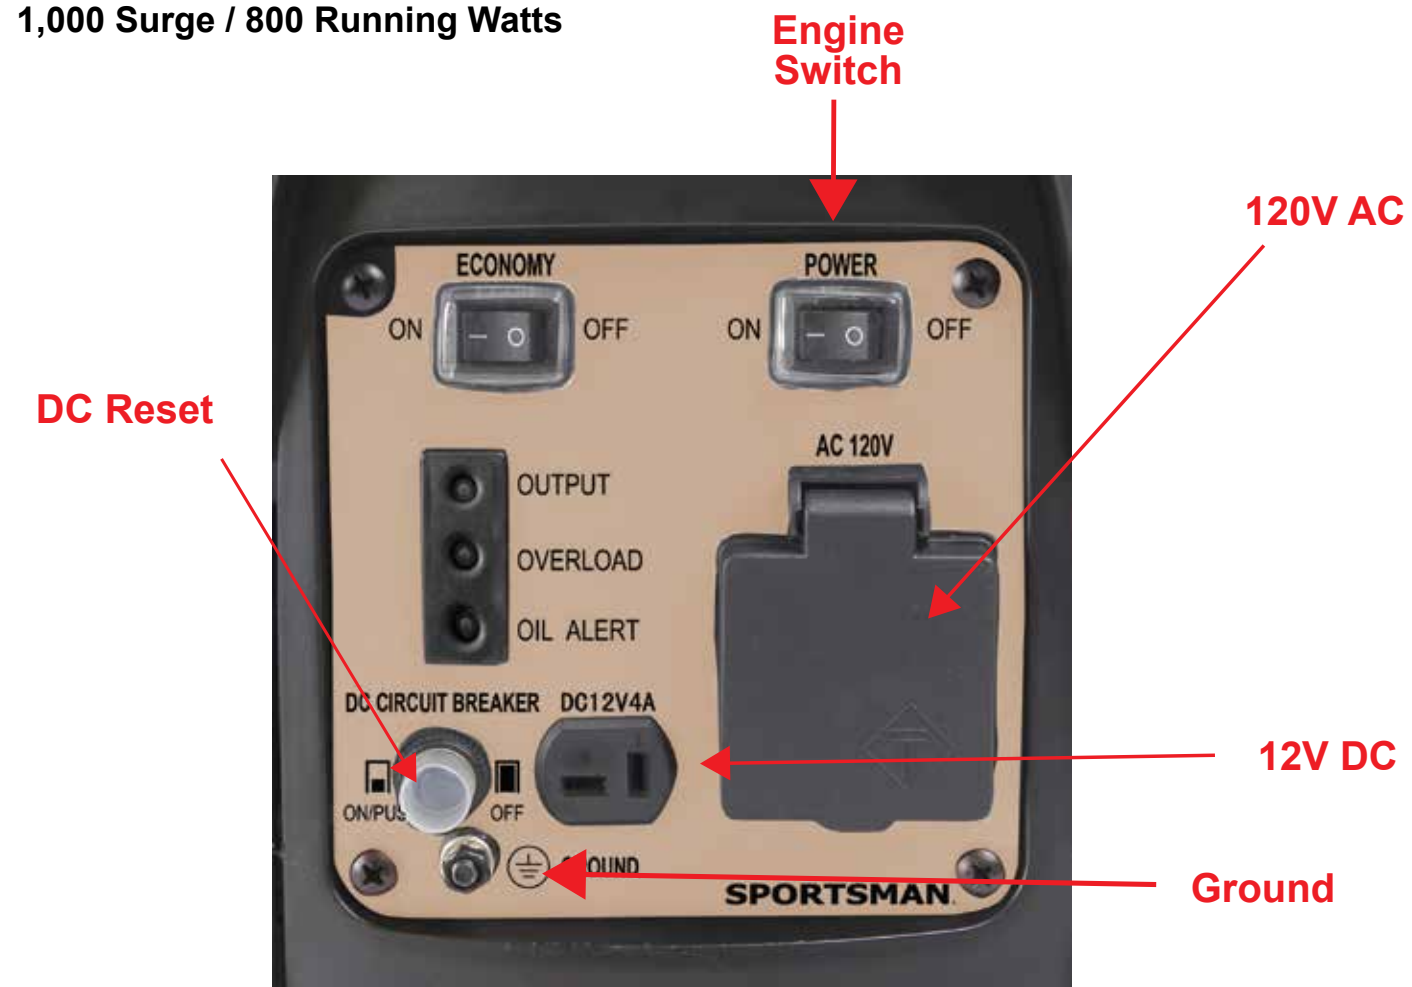

## WARNING

**IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!**

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

**WARNING:** NEVER use a generator inside a home or a garage, **EVEN IF** the doors and windows are open.

**ONLY USE OUTSIDE** and far away from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

## NOTES

DO NOT CONNECT electrical devices until AFTER the generator is started.

**WARNING:** According to the State of California, the exhaust from this generator contains chemicals known to cause cancer, birth defects, or other reproductive harm.

**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

**Need Help? Do Not Return This Generator To The Store! Call Us First!**  
Monday-Friday 8:00-4:30 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)

**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

**Need Help? Do Not Return This Generator To The Store! Call Us First!**  
Monday-Friday 8:00-4:30 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)