



## How To Install Item # GSSIMOS Outriggers to Item # GSSIM Scaffolding

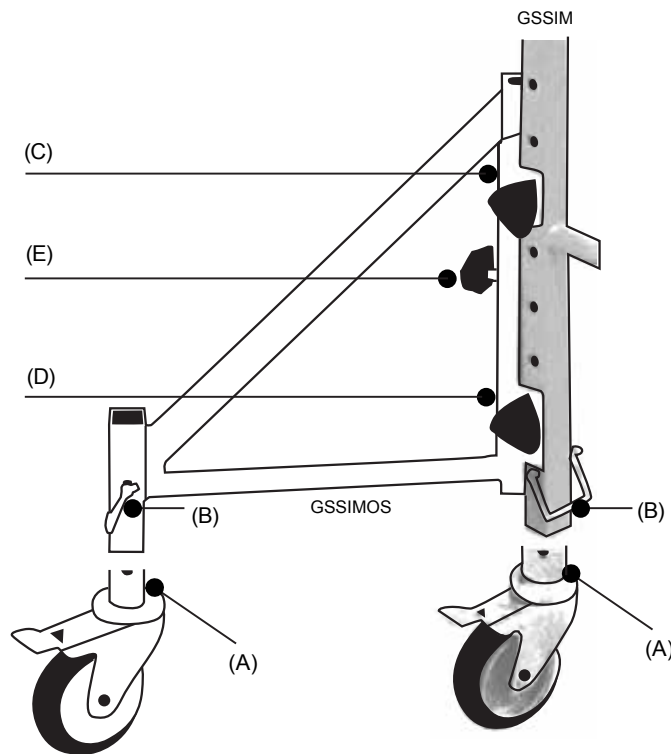

- (A)** Remove Locking Casters From GSSIM And Insert Into Outrigger
- (B)** Attach Connector Pins To Secure The Locking Casters Into Outrigger
- (C)** Attach Outrigger To The GSSIM Then Tighten Knob
- (D)** Tighten The Knob
- (E)** Tighten/Untighten Knob To Lock/Unlock Pivot
- (F)** Repeat On Remaining 3 Sides

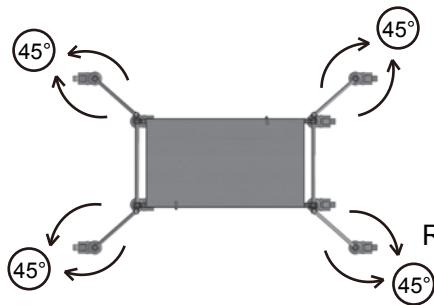

### NOTE

Rotate outriggers at 45° angle



### WARNING

OUTRIGGERS REQUIRED WHEN STACKING. DO NOT STACK MORE THAN TWO UNITS HIGH.

### WARNING

ROTATE OUTRIGGER TO 45° ANGLE FOR GREATER STABILITY.

### WARNING

BE CERTAIN THE LOCKING CASTERS ARE LOCKED BEFORE CLIMBING ON SCAFFOLD.

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

HAVE QUESTIONS OR PROBLEMS? DO NOT RETURN THIS PRODUCT TO THE RETAILER - CONTACT CUSTOMER SERVICE FIRST.

If you experience a problem or need parts for this product, visit our website <http://www.buffalotools.com> or call our customer help line at 1-636-532-9888, Monday-Friday, 8 AM - 4 PM Central Time. A copy of the sales receipt is required.