

# Step-By-Step Quick Start Guide To Using Your Generator

## 1 Remove Generator From Package

## 2 Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)  
Oil Capacity: 13.5 fluid oz  
Because this generator includes Low Oil Shut Off, the generator will not start with low oil. Start out with 13.5 oz, then fill until almost overflowing.)

## 3 Add Fuel

- If using Gasoline, add Unleaded gasoline only octane rating of 87 or higher. Maximum Capacity: 1.2 Gallon gasoline fuel tank
- If using Propane, connect Regulator Hose to Propane Tank and the LP Gas Inlet on Generator. Then turn the Tank valve to the "on" position.

## 4 Start The Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- Turn Engine Switch to ON
- A. If using GASOLINE, Turn FUEL PETCOCK to ON (Figure A)
- B. If using PROPANE, connect Turn Tank Valve to ON (Figure B)
- Adjust the CHOKE to "Closed/Choke" position (Figure C)
- Start the generator manually with the Recoil (Pull) Start.
- Once the engine has started, GRADUALLY move the choke lever to the "RUN/OPEN" position until the engine levels off. Then let the engine run approximately 5 minutes BEFORE adding appliances or tools.
- You can now connect electrical devices.



Fuel Petcock (Figure A)



LP Gas Inlet (Figure B)

Choke (Figure C)



**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

**Need Help? Do Not Return This Generator To The Store! Call Us First!**  
Monday-Friday 8:00-4:30 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)

# GEN2000DF

2,000 Surge / 1,400 Running Watts

**POWERED BY UNLEADED  
GASOLINE OR PROPANE FUEL**

### GENERATOR SPECIFICATIONS:

- 3.5 HP Engine, 4 Stroke OHV
- Recoil Start
- 1.2 Gallon Fuel Tank
- Low Oil Shut Off
- UL Listed Electrical Components
- Engine Shut Off Switch
- Circuit Breaker & Power Outlets
- 1-12V DC Outlet
- 2 -120V AC Outlets
- Complies with EPA emissions
- Runs 9 hours @ 50% load (GAS)
- Runs 12 hours @ 50% Load on 20 lbs of LPG Fuel
- Decibel Rating < 68 db @ 0% Load
- Propane fuel hose / regulator included
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited
- \* SURGE WATTS / RUNNING WATTS  
MAY BE REDUCED BY 10% WHEN USING  
PROPANE FUEL VS USING GASOLINE.

**OIL IS NOT INCLUDED WITH THIS  
GENERATOR. IT IS SOLD SEPARATELY.**


Read and understand instruction manual before using generator.



# GEN2000DF

2,000 Surge / 1,400 Running Watts

POWERED BY UNLEADED  
GASOLINE OR PROPANE FUEL

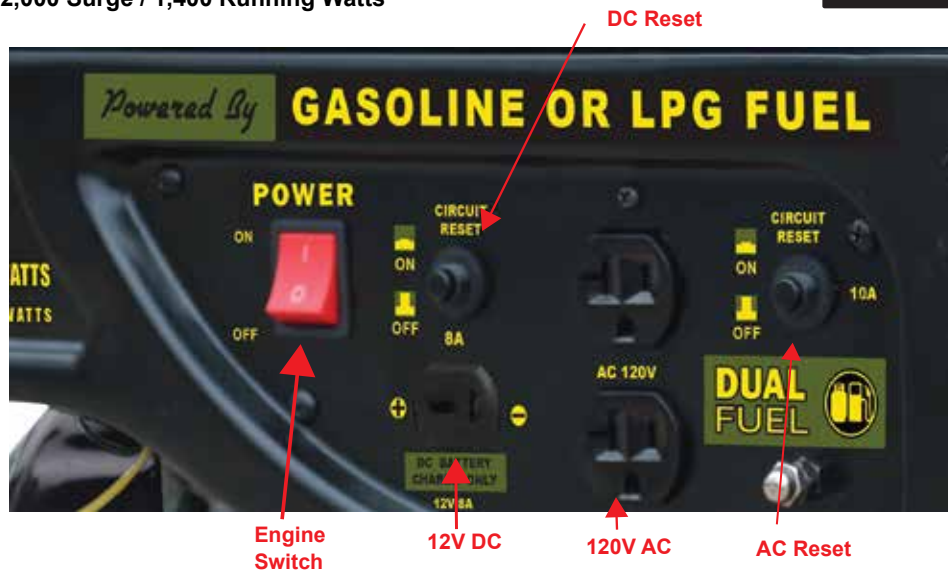

DO NOT CONNECT electrical devices until AFTER the generator is started.

## WARNING

**IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!**

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

**WARNING:** NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

**ONLY USE OUTSIDE** and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

## NOTES

Outlets available on this generator, from left to right:  
One 12V DC outlet  
Two 120V AC outlets

**TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436**

**Need Help? Do Not Return This Generator To The Store! Call Us First!  
Monday-Friday 8:00-4:30 Central Time**

**Visit our website for Troubleshooting & Frequently Asked Questions**

**SPORTSMAN**

[www.sportsmanseriesbrand.com/generators](http://www.sportsmanseriesbrand.com/generators)