

Follow This Step-By-Step Guide To Using Your Generator

1 Remove generator from package

2 Mix 2-Cycle Oil with Gas

Mix unleaded gasoline with 2-cycle oil for outdoor power equipment with 50:1 mix. (1 gal/2.5 oz)

3 Add Fuel

Remove cap from top of generator and add maximum 1 gallon into fuel tank

4 Start The Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- Turn Power Switch to ON
- Turn FUEL PETCOCK to ON (Figure A)
- Adjust the CHOKe to CLOSED TO START position
- Start the generator manually with the Recoil (Pull) Start.
- Once the engine has started and runs for about a minute, move the choke lever slowly towards the "Open To Run" position.
- You can now connect electrical devices.
DO NOT CONNECT electrical devices until AFTER the generator is started.

Fuel Petcock



(Figure A)

WARNING

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!


Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

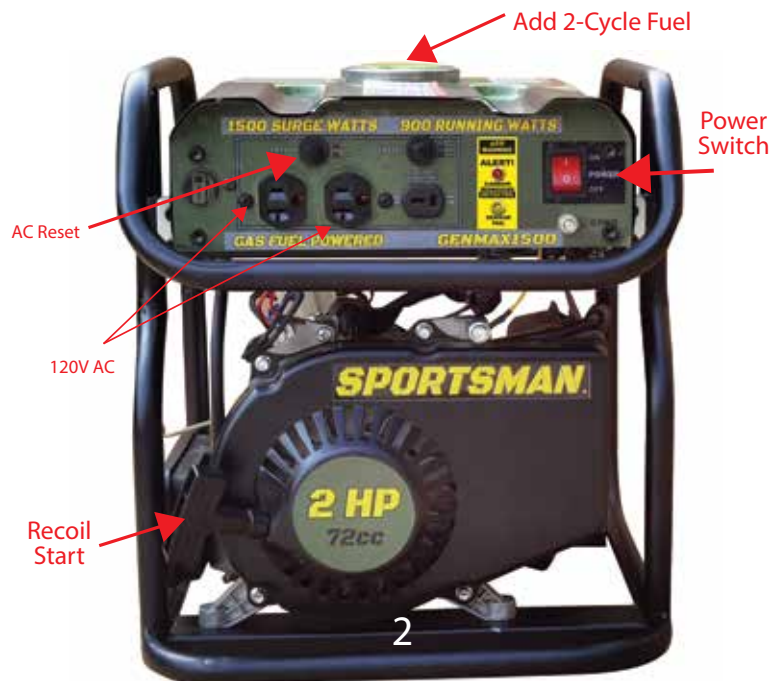

CO

GENMAX1500

1,500 Surge / 900 Running Watts

Unleaded Gas & Mixed 2-Cycle Oil (50:1)

GENERATOR SPECIFICATIONS:

- 2 - 120V A/C Outlet
- 1 - 12V D/C Outlet
- Recoil Start
- 2 HP 2-Cycle Fuel Engine
- Displacement: 72cc
- Phase: Single
- AC Voltage: 120V @ 60Hz
- Decibel Rating <65 db @ 24 Feet
- Complies with EPA emissions
- Engine Run Time: 8 Hours @ 50% Load
- Fuel Tank Capacity: 1 Gallon
- Fuel: Unleaded Gas & 2-Cycle Oil Mix (50:1)
- DO NOT use E85 or modify the engine to run on alternate fuels.
- High Altitude Use: This generator is not recommended for high altitude use above 3,000 feet above sea level.
- If you are using a generator 3,000 feet above sea level, the generator may not function properly because of air flow getting through the carburetor.

2-CYCLE OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.

Read and understand instruction manual before using generator.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

ATTENTION
CO
WARNING
ALERT!

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

Need Help? Call Customer Service!
Monday-Friday 8:00 AM - 4:00 PM Central Time


SPORTSMAN

GENMAX1500

1,500 Surge / 900 Running Watts

Unleaded Gas & Mixed 2-Cycle Oil (50:1)

CONTROL PANEL FEATURES

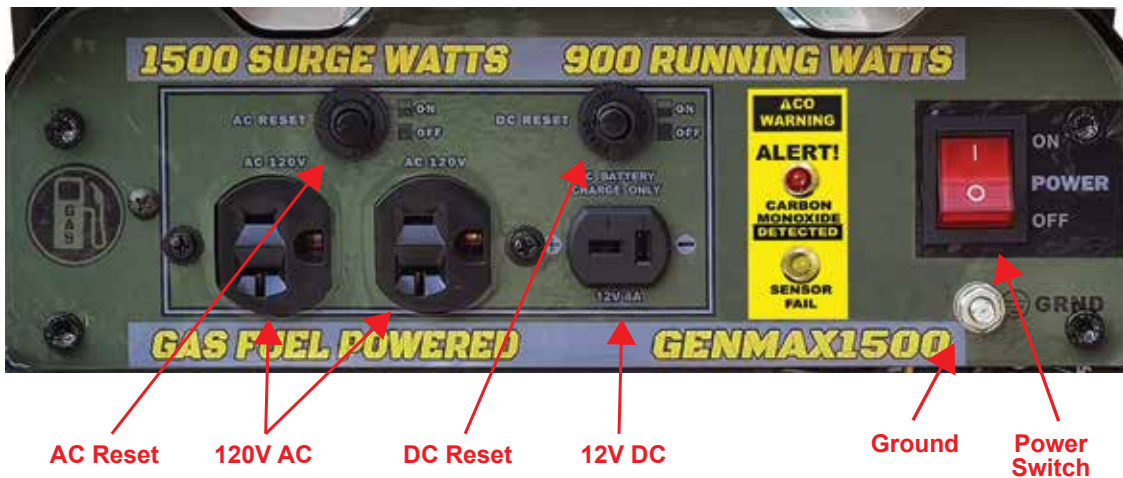

DO NOT CONNECT electrical devices until AFTER the generator is started.

NOTES

Outlets available on this generator, from left to right:

- 2 x 120 Volt A/C Outlet
- 1 x 12 Volt D/C Outlet

WARNING

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

ATTENTION CO WARNING ALERT!

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

WARNING Carbon monoxide (also known as CO) can be dangerous for humans and pets. Carbon monoxide poisoning can lead to death in a very short time. It is called "the silent killer" because it is odorless, tasteless and invisible: you may be exposed without knowing it.

NOTE: The indicator will light RED and the engine will shutdown if dangerous Carbon Monoxide levels are detected. The engine will not restart for 5 minutes. If an error in the carbon monoxide system is detected, the indicator will blink YELLOW and the engine will shutdown for five minutes.

READ MANUAL FOR COMPLETE CO WARNING INSTRUCTIONS!

WARNING! IF DANGEROUS CARBON MONOXIDE LEVELS ARE DETECTED, ENGINE WILL SHUTOFF

AUTOMATIC SHUTOFF - YOU MUST:

MOVE GENERATOR TO AN OPEN, OUTDOOR AREA
POINT EXHAUST AWAY. DON'T RUN GENERATOR IN
ENCLOSED AREAS (E.G. NOT IN HOUSE OR GARAGE)

The indicator will light RED and the engine will shutdown if dangerous CO levels are detected. The engine will not restart for 5 minutes. If an error in the carbon monoxide system is detected, the indicator will light YELLOW.

MOVE TO FRESH AIR AND
GET MEDICAL HELP IF SICK,
DIZZY OR WEAK.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

Need Help? Call Customer Service!
Monday-Friday 8:00 AM - 4:00 PM Central Time

SPORTSMAN